



SEL357-000



SEL357-036




SEL357-066



SEL357-101



SEL357-112



SEL357-120



SEL357-157



SEL357-208



SEL357-259




SEL357-298



SEL357-315



SEL357-328



SEL357-361



SEL357-390



SEL357-421



SEL357-431



SEL357-455




SEL357-512

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Reverse hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



SEL357-564




SEL357-589



SEL357-685



SEL357-750



SEL357-796



SEL357-820




SEL357-891



SEL357-912



SEL357-930



SEL357-987

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Reverse hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Reverse hang / Random match


T +44(0)20 8211 3107

E sales@seltex.co.uk


Fire rating:
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code




SEL348-001



SEL348-002



SEL348-003



SEL348-004



SEL348-005



SEL348-006




SEL348-007



SEL348-008



SEL348-009



SEL348-010




SEL348-011




SEL348-012



SEL348-013




SEL348-014



SEL348-015



SEL348-0016



SEL348-0017



SEL328-003



SEL328-017




SEL328-116



SEL328-123



SEL328-147



SEL328-255



SEL328-258



SEL328-321



SEL328-357



SEL328-369



SEL328-387



SEL328-411



SEL328-456



SEL328-498



SEL328-546



SEL328-589



SEL328-609



SEL328-611

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Straight hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



SEL328-628



SEL328-685



SEL328-753



SEL328-880



SEL328-892



SEL328-922



SEL328-960



SEL328-999

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Straight hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



SEL332-000SEL332-039SEL332-111SEL332-123SEL332-159SEL332-162



SEL332-171SEL332-193SEL332-269SEL332-392SEL332-439SEL332-444



SEL332-459SEL332-517SEL332-548SEL332-661SEL332-743SEL332-821

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Straight hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:


B-s2-d0 to BS EN 13501-1: 2007

Class "0" & "1" to BS476, parts 6 & 7

Class A to ASTM E-84

Passes NFPA 286 Corner Burn

NFPA 101 Life Safety Code



SEL332-855



SEL332-856



SEL332-909



SEL332-932



SEL332-966

Performance Specifications	
Total Weight (Avg)	452g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	22.22m
Fabric Backing	Yes
Installation	Straight hang / Random match

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating:


B-s2-d0 to BS EN 13501-1: 2007

Class "0" & "1" to BS476, parts 6 & 7

Class A to ASTM E-84

Passes NFPA 286 Corner Burn


NFPA 101 Life Safety Code

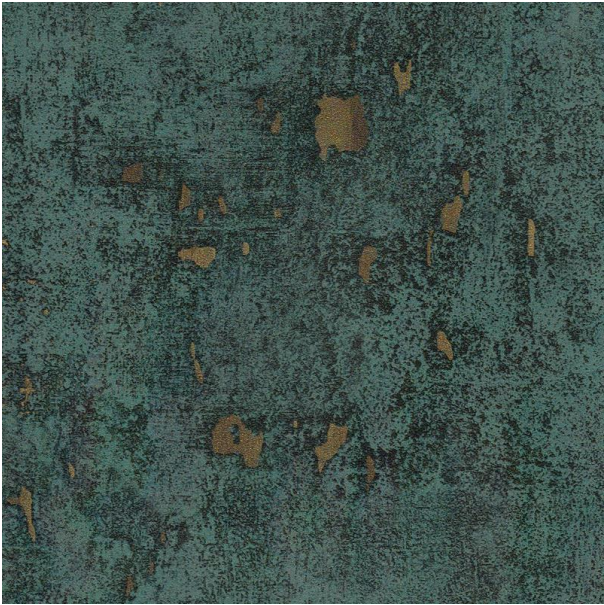

SEL344-080



SEL344-092



SEL344-107



SEL344-126




SEL344-157



SEL344-285



SEL344-328




SEL344-349



SEL344-374




SEL344-413



SEL344-438



SEL344-492




SEL344-555



SEL344-561



SEL344-579



SEL344-614



SEL344-683



SEL344-694

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ


T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

seltex.co.uk

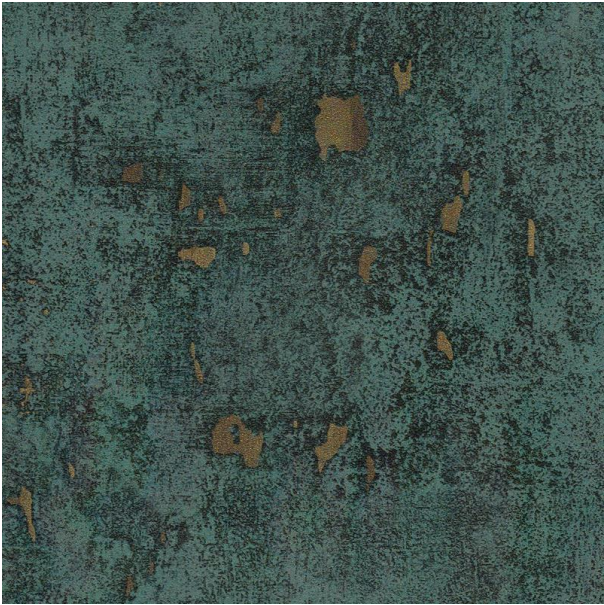

SEL344-735




SEL344-740



SEL344-842



SEL344-858



SEL344-926



SEL344-961



SEL344-973

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

seltex.co.uk




SEL345-021




SEL345-038



SEL345-053



SEL345-126



SEL345-147



SEL345-164



SEL345-198



SEL345-215



SEL345-285



SEL345-322



SEL345-374



SEL345-382



SEL345-408



SEL345-431




SEL345-486



SEL345-490



SEL345-512



SEL345-576

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ

B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007

Class "0" & "1" to BS476, parts 6 & 7


Class A to ASTM E-84

Passes NFPA 286 Corner Burn

NFPA 101 Life Safety Code

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

seltex.co.uk




SEL345-579



SEL345-600



SEL345-649



SEL345-683



SEL345-719



SEL345-730




SEL345-735



SEL345-777



SEL345-814



SEL345-821



SEL345-834



SEL345-912



SEL345-960

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ


T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

seltex.co.uk

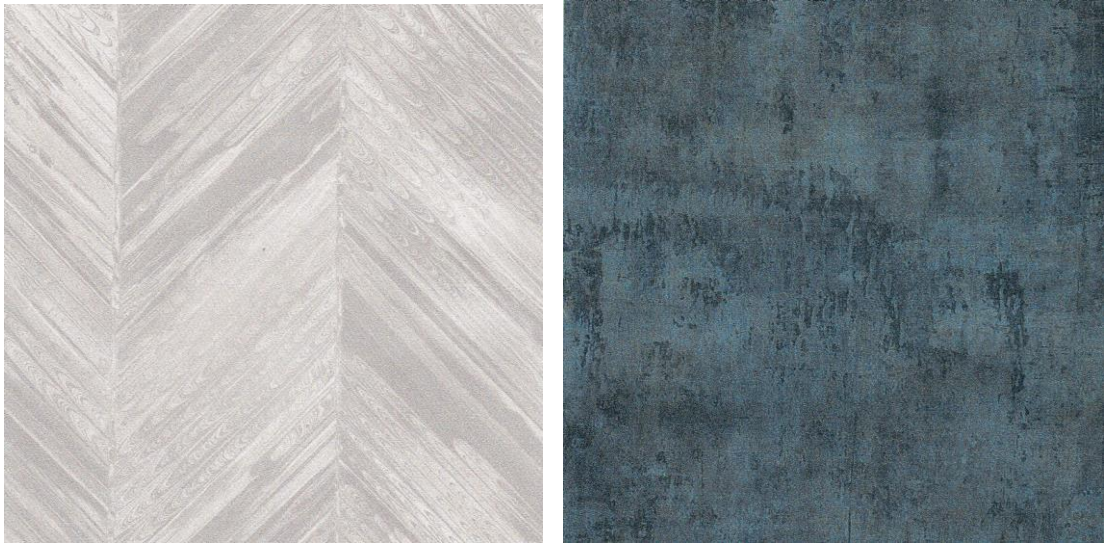

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ


T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

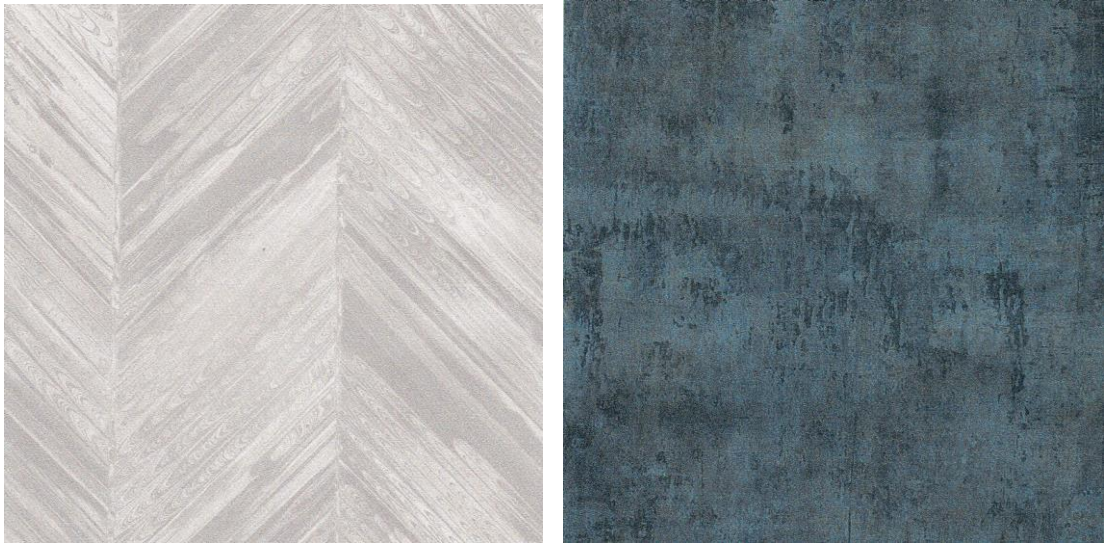


SEL346-618



SEL346-713




SEL346-739



SEL346-803



SEL346-859



SEL346-937



SEL346-945

Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s1-d0 (B-s2-d0 Mylar) to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.

seltex.co.uk



Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code



*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.




Performance Specifications	
Total Weight (Avg)	350g/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.43m
Fabric Backing	Yes
Installation	May differ

T +44(0)20 8211 3107

E sales@seltex.co.uk

Fire rating: May Differ
B-s2-d0 to BS EN 13501-1: 2007
Class "0" & "1" to BS476, parts 6 & 7
Class A to ASTM E-84
Passes NFPA 286 Corner Burn
NFPA 101 Life Safety Code

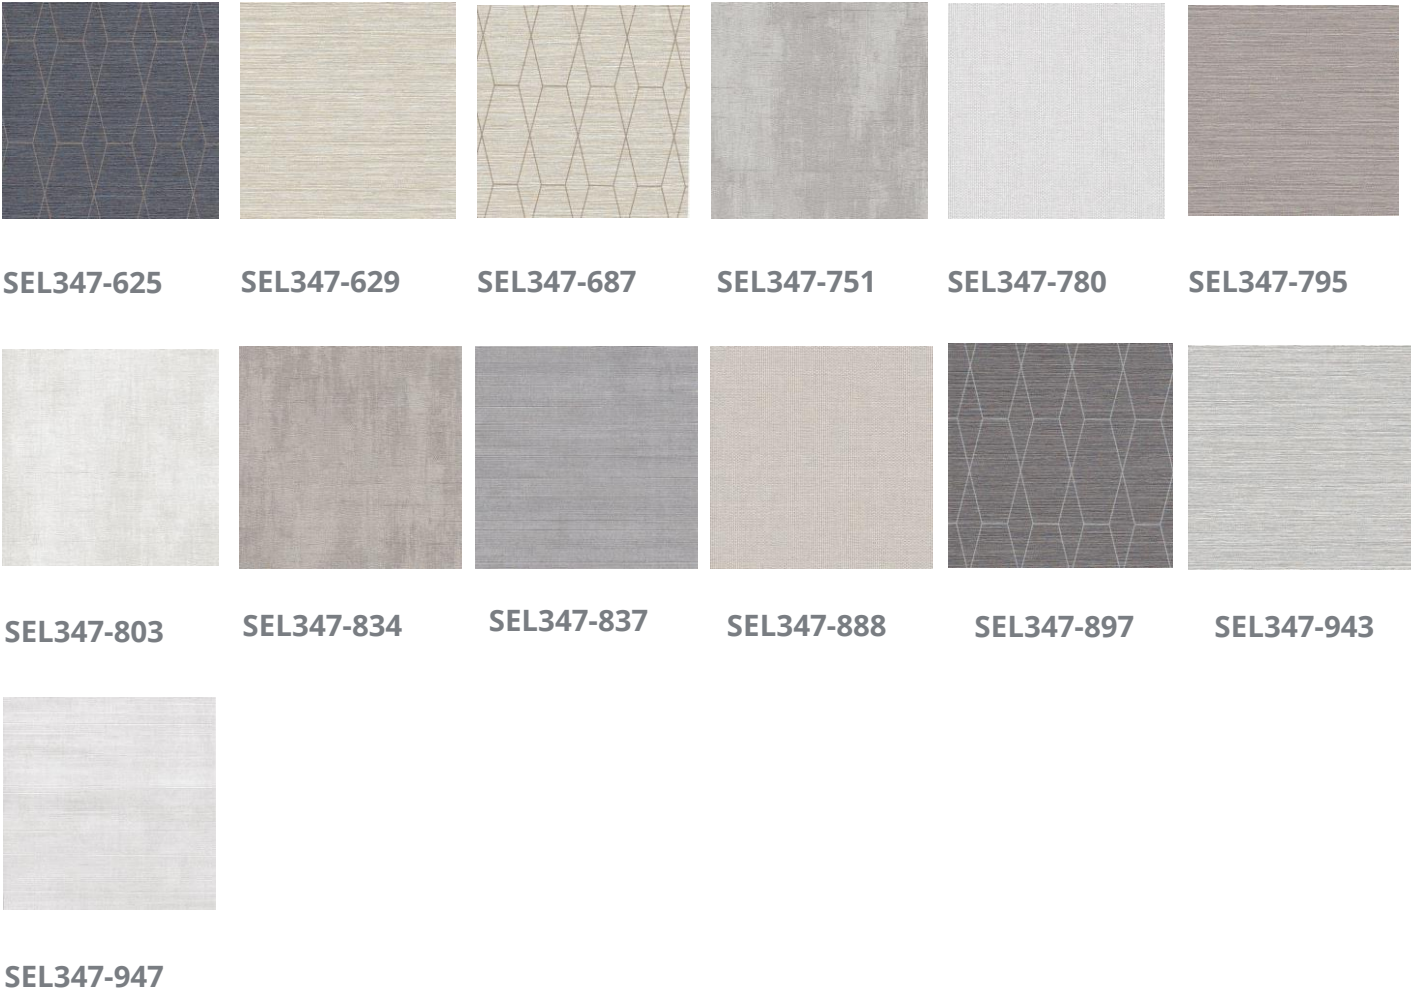

*Please note that the products in this collection may differ in specifications and fire ratings. For more information, please contact us.