

Seltex
wallcoverings

PVC-Free
Wallcoverings



In an era marked by heightened environmental awareness, Seltex Evolve PVC-free contract wallcoverings are setting a new standard in sustainable interior design. These innovative wallcoverings not only elevate the aesthetics of interior spaces but also prioritise environmental responsibility by being entirely free of PVC (polyvinyl chloride). Let's explore what makes Seltex Evolve a pioneering choice for the environmentally conscious.



Sustainable Material Choices

Seltex Evolve is crafted using alternative materials that are not only eco-friendly but also high-performance. These materials are carefully selected to ensure the wallcoverings meet the stringent standards of the contract design industry. This combination of sustainability and performance is a testament to Seltex's dedication to delivering quality products that do not compromise on aesthetics or durability.

Versatile Design Options

Seltex Evolve PVC-free contract wallcoverings offer a diverse range of design options to cater to various tastes and interior spaces. Whether you're aiming for a classic, elegant look or a contemporary, vibrant atmosphere, Seltex Evolve has a wide array of patterns, colours, and textures to choose from. This versatility allows designers and architects to achieve their creative vision while making a sustainable choice.

Exceptional Durability


Contract wallcoverings are subjected to rigorous wear and tear in commercial spaces, making durability a top priority. Seltex Evolve excels in this regard, providing robust protection for walls against stains, abrasion, and fading. Its long-lasting performance ensures that your investment stands the test of time, reducing the need for frequent replacements.





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



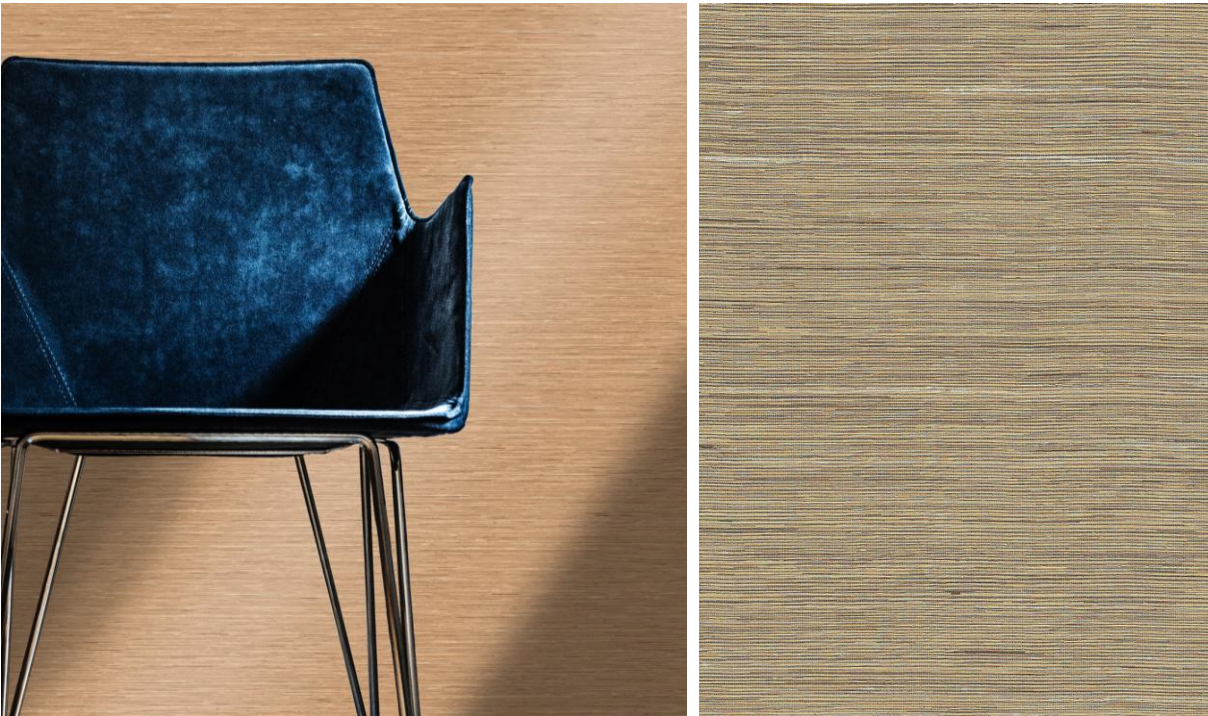

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO312-117



EVO312-169



EVO312-197



EVO312-238



EVO312-279



EVO312-342



EVO312-375



EVO312-383



EVO312-399



EVO312-462



EVO312-589



EVO312-592



EVO312-653



EVO312-705



EVO312-793



EVO312-820



EVO312-884



EVO286-130




EVO286-222



EVO286-238



EVO286-380



EVO286-456



EVO286-554



EVO286-577



EVO286-592



EVO286-686



EVO286-712



EVO286-867




EVO286-959



EVO286-973

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84

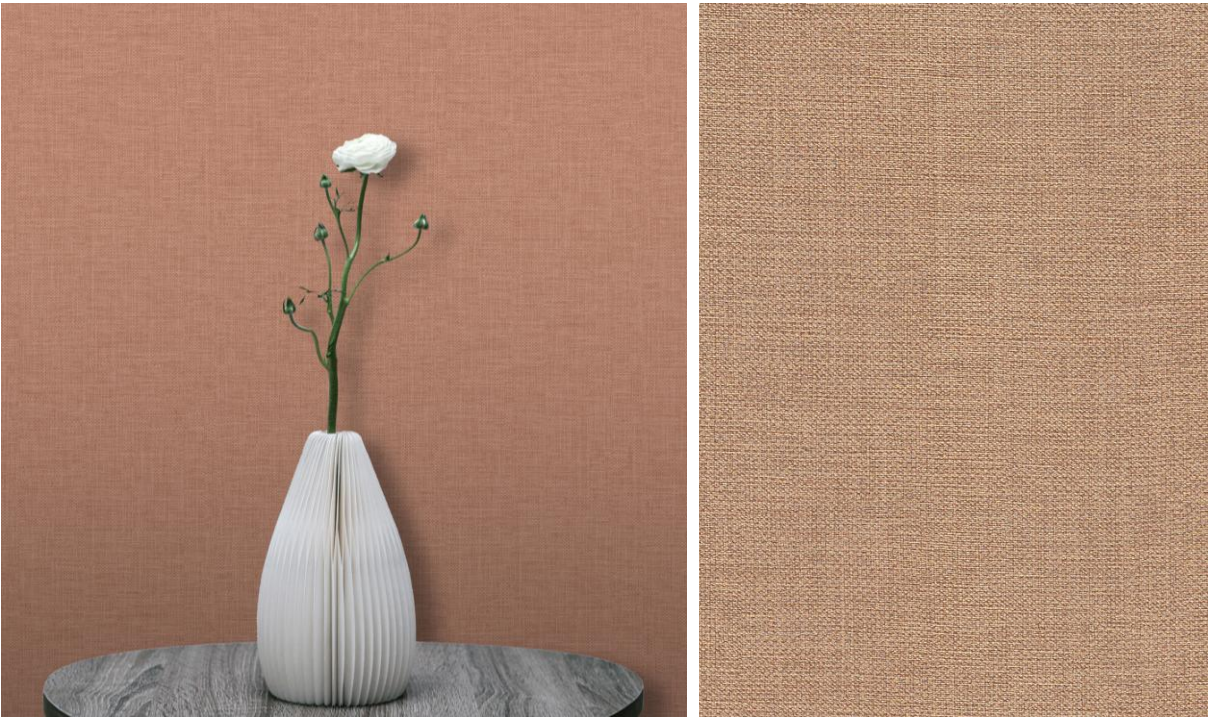

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO317-010



EVO317-035



EVO317-128



EVO317-188



EVO317-261



EVO317-332



EVO317-359



EVO317-387



EVO317-444



EVO317-473



EVO317-481



EVO317-550



EVO317-647



EVO317-685




EVO317-776



EVO317-814



EVO317-875

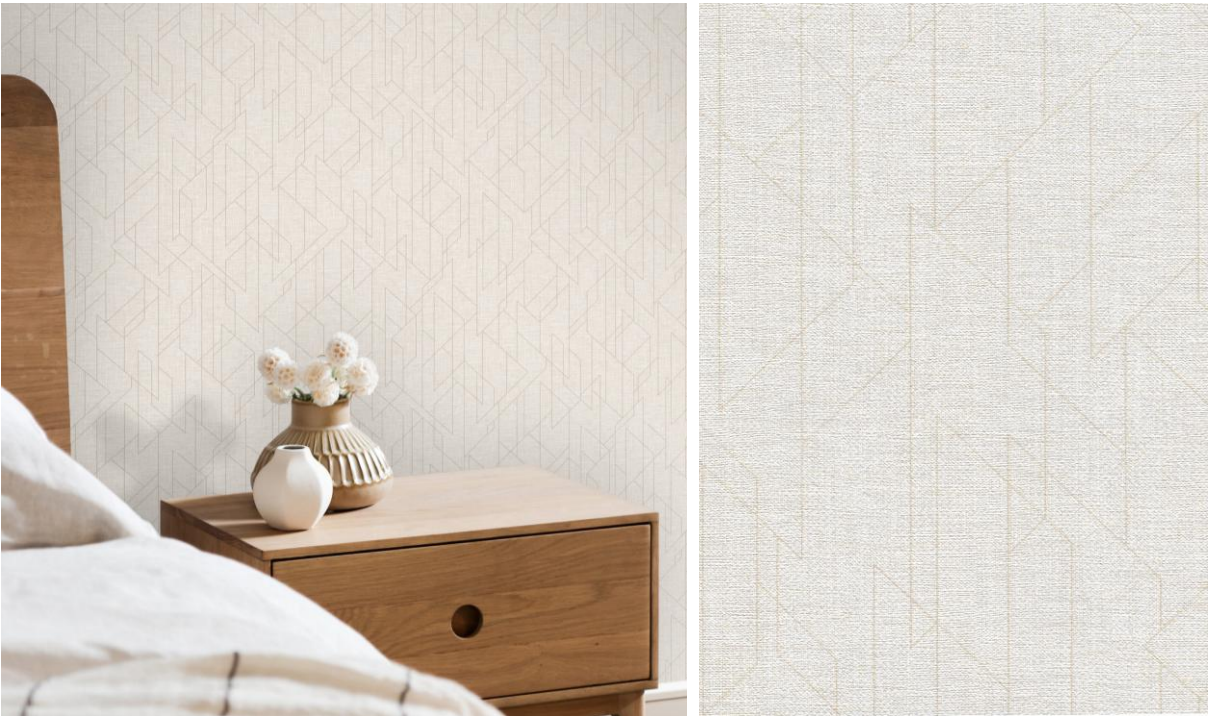

EVO318-130




EVO318-222



EVO318-238



EVO318-287



EVO318-380



EVO318-456



EVO318-554



EVO318-577



EVO318-589



EVO318-592



EVO318-653



EVO318-686



EVO318-712



EVO318-793



EVO318-867



EVO318-959



EVO318-973

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



SEL291-169



SEL291-197



SEL291-238



SEL291-279



SEL291-307



SEL291-375



SEL291-383



SEL291-399



SEL291-406



SEL291-462



SEL291-589



SEL291-705



SEL291-793



SEL291-816



SEL291-820



SEL291-884



SEL291-944



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO313-010



EVO313-035



EVO313-067



EVO313-128



EVO313-188



EVO313-261



EVO313-332



EVO313-359



EVO313-387



EVO313-444



EVO313-481



EVO313-513



EVO313-550



EVO313-647



EVO313-685



EVO313-814



EVO313-982



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Non-Reverse / Random match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO316-067



EVO316-117




EVO316-286



EVO316-307



EVO316-342



EVO316-406



EVO316-456



EVO316-513



EVO316-628



EVO316-816



EVO316-944



EVO316-982



EVO316-998



EVO292-035



EVO292-067



EVO292-117



EVO292-128



EVO292-261




EVO292-286



EVO292-342



EVO292-359



EVO292-444



EVO292-481



EVO292-513



EVO292-550



EVO292-628



EVO292-647



EVO292-685



EVO292-982



EVO292-998

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Non-Reverse / Align at arrows
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO319-169



EVO319-197



EVO319-279



EVO319-375



EVO319-383




EVO319-399



EVO319-462



EVO319-705



EVO319-820



EVO319-884



SEL290-130



SEL290-222



SEL290-287



SEL290-380



SEL290-456



SEL290-473



SEL290-554



SEL290-577



SEL290-592



SEL290-653



SEL290-686



SEL290-712



SEL290-814



SEL290-867



SEL290-875




SEL290-959



SEL290-973

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84

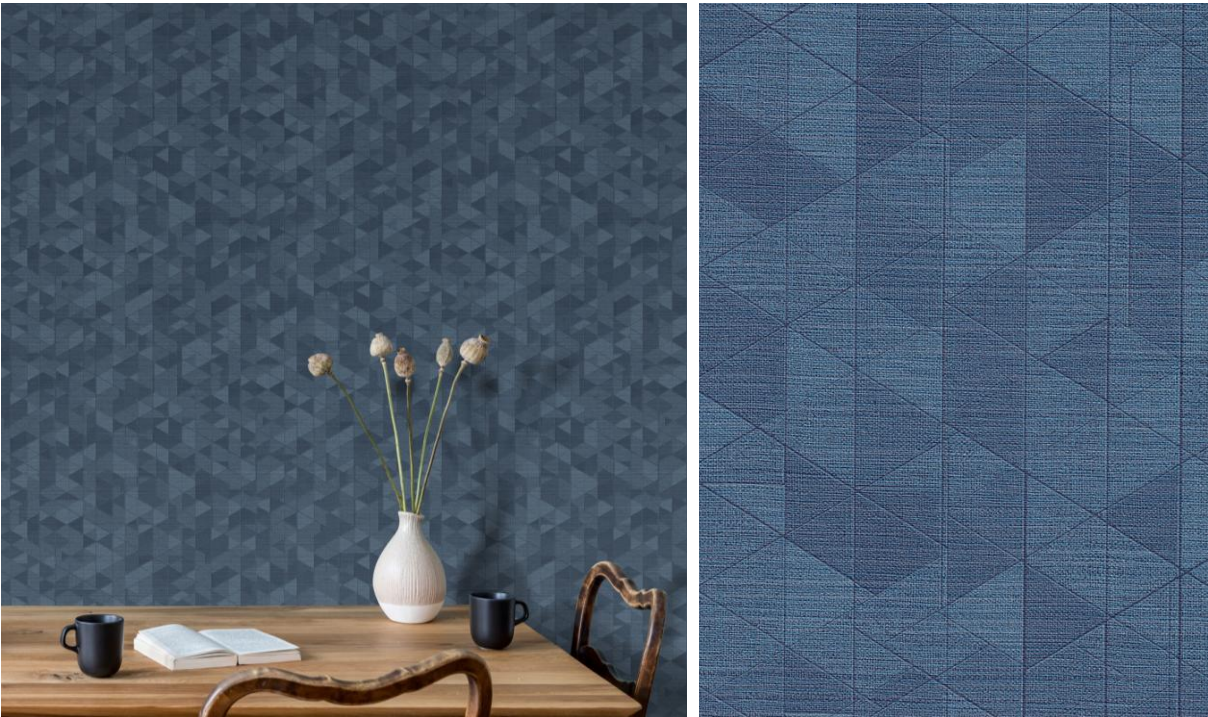

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / V: 45.72cm H:33.66cm
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO284-035



EVO284-128



EVO284-359



EVO284-444



EVO284-484



EVO284-513



EVO284-550



EVO284-647



EVO284-685



EVO284-982



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1: 2007 Class A to ASTM E-84



EVO314-130



EVO314-222



EVO314-287



EVO314-380



EVO314-456



EVO314-473



EVO314-554



EVO314-577



EVO314-592



EVO314-653



EVO314-686



EVO314-712



EVO314-776



EVO314-867



EVO314-875



EVO314-959



EVO314-973